

JRMC Series Thermostats

The model JRMC Series is a bimetallic creep action(slow break / slow make) temperature regulating or thermal limiting device and are available with gold diffused contacts for low voltage/current application.

Features:

- 1) Factory pre-set calibration; not field adjustable
- 2) No-built-in differential between, opening and closing temperature
- 3) Available in normally closed and normally open configuration
- 4) Conductive bimetal carries the circuit current
- 5) Different insulating sleeves
- 6) Various Leads Available

Electrical Ratings:

2 AMPS@120VAC / 2 AMPS @ 24VDC
 Temperature range from 5 C to 150C in 5deg. increments
 Standard tolerance +/-5C
 Optional +/-3C
 Contact Resistance: <50 m ohm



Markings:



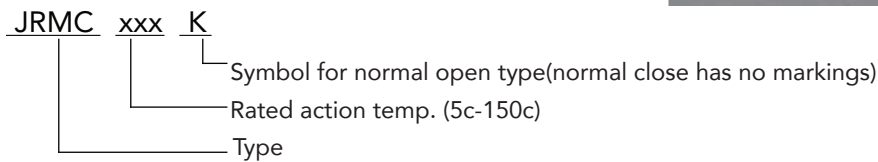


Figure:

Code of figure (mm) Type	A	B	L1	L2
JRMC	4.8 +/- 0.2	2.4 +/- 0.2	16 +/- 1	According to customers' requirement

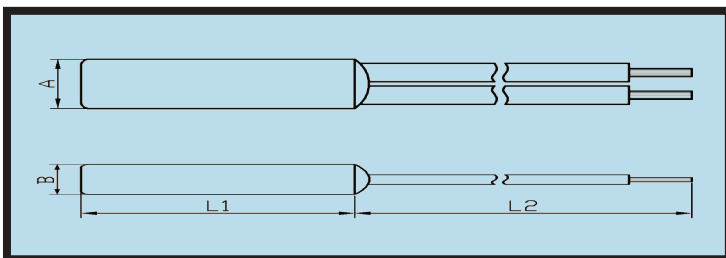

*Complying with RoHS

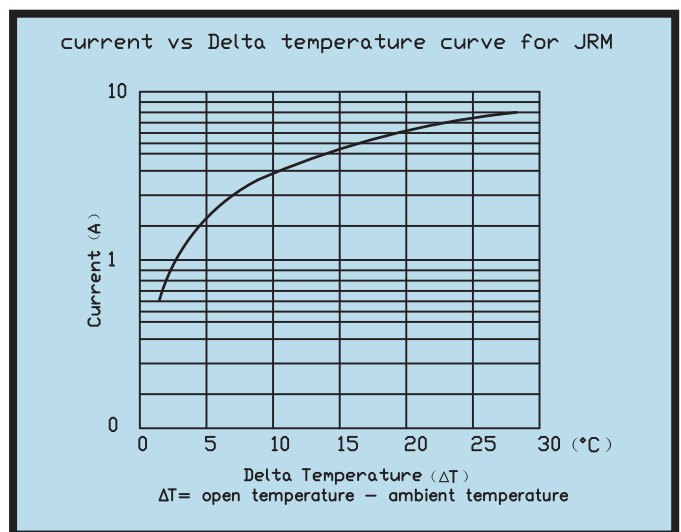

Phone: 330-966-3796
 Fax: 330-408-7085
 sales@calcoelectric.com
 2381 Locust St. S., Unit #6
 Canal Fulton OH, 44614
 www.calcoelectric.com